



FRONT VIEW OF STAINLESS STEEL SLUICE GATE AFTER INSTALLATION

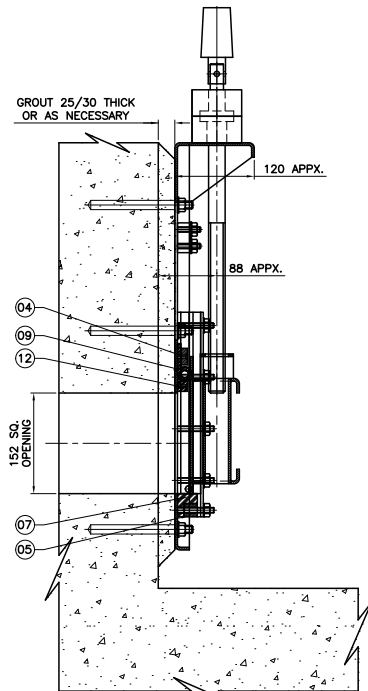

SIDE VIEW WITH CUT SECTION OF WALL FOR CONVENTIONAL BOTTOM CLOSURE GATE

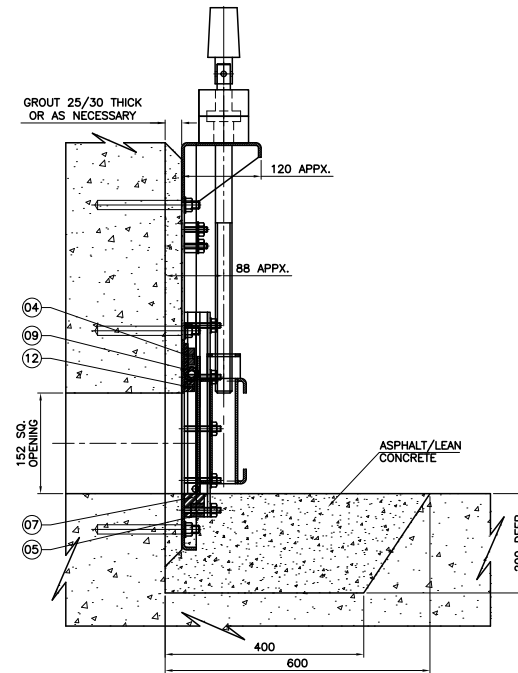

SIDE VIEW WITH CUT SECTION OF WALL FOR FLUSH BOTTOM CLOSURE GATE

16	UPPER PLATE	HDPE
15	LOWER PLATE	
14	END CAP FOR SPINDLE CONNECTION	ASTM A216 WCB
13	SIDE GUIDE	
12	TOP SEAL SUPPORT	HDPE
11	OVER TRAVEL STOP	
10	STEM	STAINLESS STEEL EN 1.4401 (316)
09	TOP SEAL	
08	SIDE SEAL	EPDM RUBBER
07	FLUSH BOTTOM RUBBER SEAL	
06	THRUST NUT	LEADED GUN METAL BS EN-1982 LG2
05	BOTTOM SEAL RETAINER	
04	TOP SEAL RETAINER	
03	SIDE SEAL RETAINER	STAINLESS STEEL EN 1.4401 (316)
02	SHUTTER	
01	FRAME	
Sr.	DESCRIPTION	MATERIAL

- NOTES :-
- (1) ALLOWABLE DEVIATION FOR DIMENSIONS WITHOUT SPECIFIED TOLERANCES TO BE AS PER IS : 2768.
 - (2) ALL FASTENERS (NUTS, BOLTS & WASHERS) FOR GATE ASSEMBLY TO BE OF STAINLESS STEEL EN 1.4401 (316) MATERIAL.
 - (3) ALL STAINLESS STEEL FABRICATED PARTS TO BE BLAST CLEANED TO REMOVE SURFACE CONTAMINATION AND THEREAFTER PICKLED AND PASSIVATED.
 - (4) ADHESIVE CAPSULE/CHEMICAL CAPSULE & CHEMICAL ANCHOR FASTENERS TO BE ARRANGED BY CLIENT
 - (5) APPROX. OUTER DIMENSIONS OF GATE ASSLY IS 372 x 615 x 120mm.
 - (6) REFER DRG. NO. JE/SG/GEN/1490-R1 FOR SECTIONAL DETAILS.

WATERFRONT FLUID CONTROLS
 MARITIME HOUSE (SUITE 8)
 143 WOODVILLE ST, GLASGOW, G51 2RQ
 WEB: www.waterfrontfc.co.uk
 TEL: (+44) 0141-445-3781
 FAX: (+44) 0141-445-5101



REV	DATE	DESCRIPTION	APPROVAL	DRAWN BY: S.S.V.	PROJECT: ----	GENERAL TOLERANCES: MACHINING: ±0.2mm DIMS: <1000mm ±1.5mm DIMS: >1000mm ±2.0mm	FIRST ANGLE PROJECTION	DO NOT SCALE FROM THIS DRAWING
				CHECKED BY: S.A.	CLIENT NAME: ----	THIS DOCUMENT IS COPYRIGHT AND IS THE PROPERTY OF WATERFRONT FLUID CONTROLS. IT MUST NOT BE COPIED OR DISCLOSED TO A THIRD PARTY, INCLUDING MANUFACTURE OF THE PRODUCT SHOWN THEREIN, WITHOUT THE WRITTEN CONSENT OF THE COMPANY.		
				APPROVED BY: D.K.	LOCATION: ----	© 2009 WATERFRONT FLUID CONTROLS		

TITLE: DETAILS OF STAINLESS STEEL FACE WALL MOUNTING, UPWARD OPENING, SELF CONTAINED, NON-RISING SPINDLE, RESILIENT SEATED, SLUICE GATE SUITABLE FOR 6M SEATING AND UNSEATING WATER HEAD. GATE SIZE 152 SQ.	DRAWING NUMBER: JE/SG/GAC/FBF/10366-A
MATERIAL: SEE MATERIAL NOTES	REV NUMBER: R1
	SHEET NUMBER 1 OF 1